

# APEX<sup>®</sup> VALVES

## LV25-25mm Limiting Valve

### APPLICATION




For extremely high flow, high demand mains pressure systems e.g. large homes, multi storey apartments and commercial applications.

### FEATURES/BENEFITS

- Forged, high quality, corrosion resistant, DR brass body
- Extremely high flow rates- up to 250 litres a minute
- Pressure compensated to give constant outlet pressure regardless of inlet pressure
- Twin adjustable (200- 600 kPa), removable cartridges for easy servicing.
- All valve seats are contained in the cartridges - no need to remove valve body from system
- Can be installed in any orientation, for external application a cap is provided to protect cartridge
- No unions, no leaks

### SPECIFICATIONS

- Inlet 25mm, 1" BSP(male)
- Outlet 25mm, 1" BSP(male)
- DR forged body
- Length 110mm
- Height 190mm
- Maximum inlet pressure 2000 kPa
- Maximum inlet temperature 65 C
- Twin, integral 60 mesh ( 250 micron) strainers

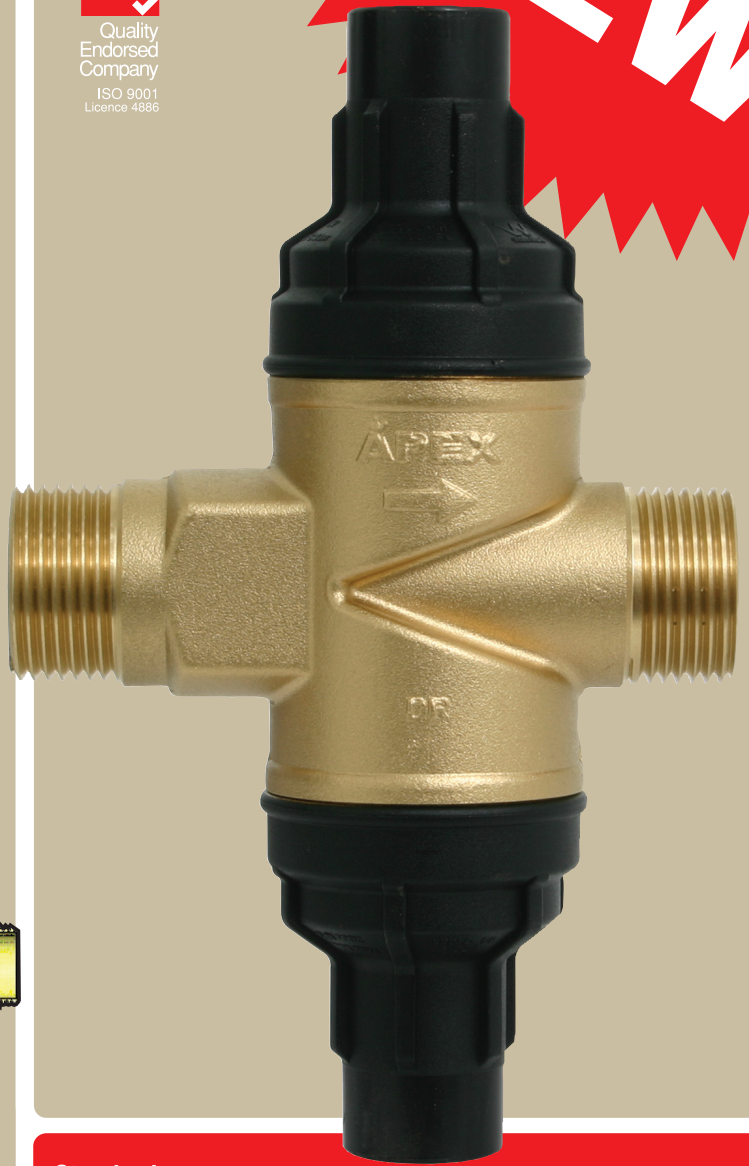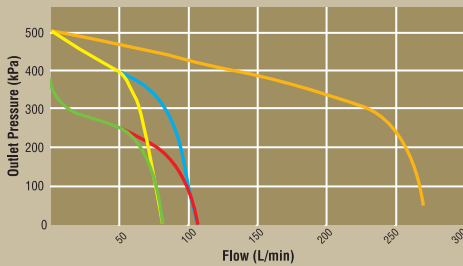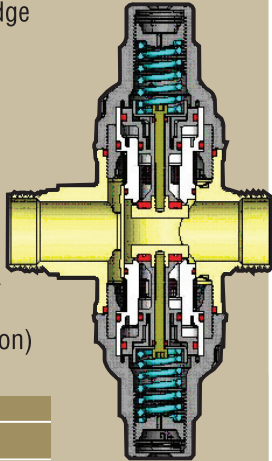

Quality System  
Quality Endorsed Company  
ISO 9001  
Licence 4686

# NEW

### Standards

- Complies with NZ building code G12 (2001)
- Complies with NZS 4608
- Cartridges Watermark approved to AS1357.1 Lic. No. WMKA02596

### MANUFACTURED BY:




Rosebank, Auckland  
New Zealand  
[www.apexvalves.co.nz](http://www.apexvalves.co.nz)

### DISTRIBUTED BY: New Zealand



PO Box 33 780  
Takapuna, Auckland  
New Zealand  
Ph 09 415 6151  
[www.hydroflow.co.nz](http://www.hydroflow.co.nz)



# APEX<sup>®</sup> VALVES

CONNECTING SERVICE WITH QUALITY