

Dux Traps

- the smart solution



All you need to know about the Dux traps range



0800 367 389
www.dux.co.nz



Fastfit Trap Information

Features and Benefits

- Fastfit compression system
- S & P Trap combinations
- 32mm, 40mm and 50mm ranges
- Complies with Standard AS2887
- Compact design with easy grip nuts
- Quick and easy to install
- No solvent welding required
- Tough and durable polypropylene
- Temperature and chemical resistant
- Watertight double taper seal

Dux Fastfit Compression System

Save time with faster and easier installation using the Dux Fastfit Compression System. This allows you to simply loosen the nut on the trap, fit it over the pipe and tighten the nut. No need to remove the nut.

The Dux double taper seal provides superior holding power over conventional single taper seals ensuring a secure, watertight fit. No wrench or adhesive required.



About Dux Fastfit Traps

Dux traps are an essential element to the plumbing of every bathroom and kitchen. They are suitable for connection to polypropylene, unplasticised PVC pipe and copper tube.

Traps are designed to maintain a waterseal under normal operating conditions. This waterseal prevents the foul air from the main sewer line entering the building.


Dux traps are polypropylene, a durable material offering rigidity and strength retention at high temperatures. They can be sterilised by steam and in the absence of stress withstand up to 150°C. Polypropylene's excellent chemical resistance characteristics make them ideal for domestic waste systems as well as hospitals, laboratories, food processing factories and most industrial and commercial applications.

(Refer to www.dux.co.nz for specific technical data).

Building Code Regulations

Dux traps comply with the NZ Building Code Regulations which require 'discharge points from sanitary fixtures and appliances shall have a water trap to prevent foul air from the plumbing system entering the building' and 'under normal operating conditions, fixture traps shall retain a water seal depth of not less than 25mm'.

'The nominal depth of water seal is 75±10mm for waste water fixture traps... The system should be tested under load conditions to ensure that a 25mm minimum water seal depth is not compromised.' (G13/AS1 3.2)

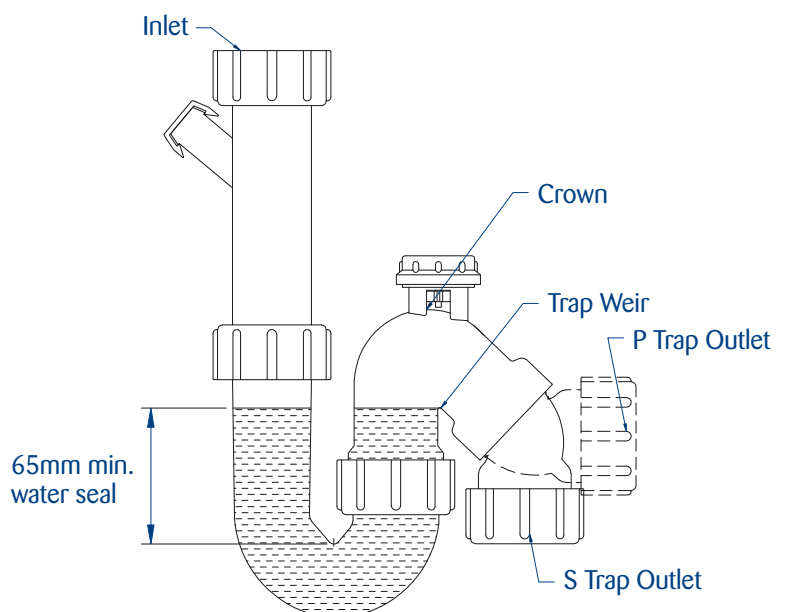

Trust Dux to offer a wide range of traps and accessories for every job.

Vented Traps

- Eases syphonic action, reduces noise and protects the waterseal
- Vent is easily accessed for maintenance
- Includes Fastfit Compression System for easy installation
- 32mm and 40mm sizes in S and P configurations



PS40CVTS

Spacesaver Traps

- Spacesaving traps reduce the area required for plumbing
- Options include telescopic for extra reach, supplementary inlets and reducing kits
- Includes Fastfit Compression System for easy installation
- Features double taper seals for a watertight connection



PS40C

Standard Traps

- The original S and P replacement traps available as an S and P combination or individual S or P bends
- Available in 32mm, 40mm and 50mm for baths, basins, showers and sinks
- The 50mm S and P trap has 2 supplementary inlets



PS32/40TA

Bottle Traps

- Ideal when space is limited under the sink
- Easily installed and easily cleaned – simply unscrew the bottom section
- Chrome option available for exposed plumbing



BP40

Accessories

- An extensive range of components to suit almost any situation
- Adaptors and connectors for added length or different threads
- Inlets, reducers, bends and tees for those additional requirements



T40FM

Specifications


A = Total height of trap (incl extension where included)

B = Total width of trap

C = S Trap width (from centre of outlet)

D = P Trap height (from centre of outlet)

Note: All dimensions are nominal

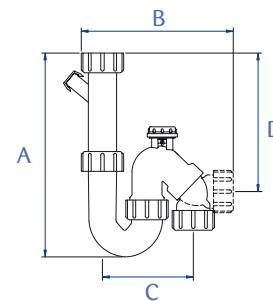

Code				A (mm)	B (mm)	C (mm)	D (mm)
VENTED TRAPS							
PS40CVT	40mm	P&S	Compact Vented Telescopic Trap	335-390	130-210	130	240-300
PS32/40CVTA	40mm	P&S	Compact Vented Telescopic Trap (with reducing kit)	220-280	130-210	130	120-190
PS40CVA	40mm	P&S	Compact Vented Adjustable Trap	180-250	130-210	130	85-160
PS40CVTS	40mm	P&S	Compact Vented Telescopic Trap (with supplementary Inlet) Note: Outside diameter is 20mm. Supplied predrilled with cap.	210-280	130-210	130	120-190
SPACESAVER TRAPS							
PS40C	40mm	P&S	Spacesaver Trap	135	130-220	140	55
PS32/40C	40mm/32mm	P&S	Spacesaver (with Reducing Kit)	215-290	130-210	130	125-200
PS40T	40mm	P&S	Spacesaver Telescopic Trap	180-260	130-210	130	85-170
PS40TS	40mm	P&S	Spacesaver Telescopic Trap (incl Supplementary Inlet) Note: Outside diameter is 20mm. Supplied predrilled with cap.	215	130-210	130	120-190
PS32/40TA	40mm/32mm	P&S	Spacesaver Telescopic Trap (with Reducing Kit)	215-290	130-190	130	120-200
ASPS32/40	40mm/32mm	P&S	Anti-Syphon Combination P&S 32/40mm Trap	200	250	185	n/a
STANDARD TRAP							
PS40A	40mm	P&S	Adjustable Combination	335-180	120-220	130	245-305
PS50S	50mm	P&S	Adjustable Trap (with 2 Supplementary Inlets)	215	270	200	n/a
P32	32mm	P	Short Inlet	140	105-145	n/a	25
P32A	32mm	P	Adjustable Inlet	215-265	105-145	n/a	95
P40	40mm	P	Short Inlet	175	145-220	n/a	25
S32	32mm	S	Short Inlet	150	105-170	115	n/a
S32A	32mm	S	Adjustable Inlet	235-290	105-170	115	n/a
S40	40mm	S	Short Inlet	205	150-240	180	n/a
BOTTLE TRAPS							
BP32	32mm	P	Short Inlet Bottle P	180	110	n/a	55
BP40	40mm	P	Short Inlet Bottle P	185	120	n/a	60
S-438	32mm/40mm		Chrome Plated Bottle Trap Note: 32 mm Inlet 32/40 mm Outlet				
ACCESSORIES							
DWA40S	40mm		Dishwasher Waste Adaptor				
DWC40	40mm		Double Waste Connector				
T40FM	40mm		Male BSP/Female BSP/Compression Tee Adaptor				
E32A	32mm		Extension Inlet (Adjustable up to 240mm)				
E40A	40mm		Extension Inlet (Adjustable up to 240mm)				
FF32	32mm		Floor Flange				
FF40	40mm		Floor Flange				
C32WH	32mm		Compression Coupling				
C40F	40mm		Compression Coupling Male to Female BSP				
C40MWH	40mm		Compression Coupling Male BSP				
C40WH	40mm		Compression Coupling				
R4032WH	32mm/40mm		Compression Coupling Reducing				
R40F32M	40mm		Waste Reducer 40mm Swivel Nut x 32mm Male BSP				
TA3240WH	32mm/40mm		Trap Adaptor				
B3295WH	32mm		Bend 32mm x 95° Compression				
B4095F	40mm		Bend 40mm x 95° Compression/Female BSP				
B4095WH	40mm		Bend 40mm x 95° Compression				
SC1630			PVC Strapping 16mm x 30m (Coil)				
SPARES							
ST404095WH	40mm		Compression Swept Tee 40mm x 40mm x 95°				
NC32WH	32mm		32mm Compression Nut White				
NC40WH	40mm		40mm Compression Nut White				
WF32	32mm		32mm Flat Trap Washer				
WF40	40mm		40mm Flat Trap Washer				
WT32	32mm		32mm Double Taper Compression Washer				
WT40	40mm		40mm Double Taper Compression Washer				
WT40A	40mm		40mm Adjustable Trap Compression Washer				
SR32	32mm		32mm Bottle Trap Seal Washer				
SR40	40mm		40mm Bottle Trap Seal Washer				
WF40M	40mm		40mm Middle Flat Trap Washer				
DSICWO			Supplementary Inlet Cap with O Ring				