

SYNTHETIC NON-RETURN AND FOOT VALVES


Spring loaded poppet type

APPLICATION

For water, air and corrosive liquids. Chemicals, hydroponics, pharmaceuticals and general (All subject to material compatibility)

DESIGN FEATURES

- Delrin casing, nitrile seal, rilsan closing system
- Polyethylene strainer for foot valve
- Max working pressure PN10 (145 psi)
- Working temperature 60°C, peak 80°C
- Exact head loss and individual technical data sheets available on request
- Can be installed at any angle
- Low water hammer generating characteristics

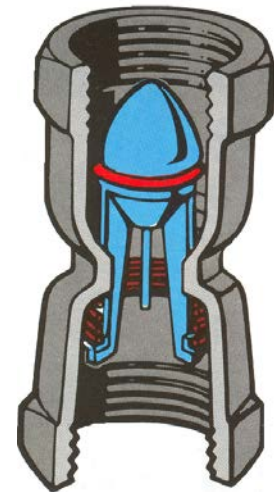

Type 290D



Type 104P

TECHNICAL DATA (NON-RETURN VALVE)

Part No	Type	Size
3319	290D	10MM BSPf
3320	290D	15MM BSPf
3321	290D	20MM BSPf
3322	290D	25MM BSPf

TECHNICAL DATA (FOOT VALVE)

Part No	Type	Size
3720	190D	15MM BSPf
2361	104P	20MM BSPf
2362	104P	25MM BSPf
2363	104P	32MM BSPf
3724	190D	40MM BSPf
3725	190D	50MM BSPf