

IN-GROUND 3000 W-1500SC


Domestic/Commercial in ground packaged pump station

APPLICATION

The Wallace In-Ground 3000 is specifically designed for large domestic and commercial applications where an establishment is below the conventional council sewer line and 24 hour storage requirement is necessary.

DESIGN FEATURES

- New Zealand designed & manufactured polyethylene chamber
- Suitable for all types of ground conditions
- Certified to AS/NZS 4766 polyethylene storage tanks for wastewater and chemicals
- Certified to AS/NZS 1546.1 on site domestic wastewater treatment facilities
- The geometric shape allows for maximum strength under compression while also offering the Advantage of anti-floatation for wet areas
- An electrical junction box is installed on the top of the tank where the power cables for the pumps and the twin high level alarm float switches are terminated
- **Refer to Submersible section for pump technical details (W-1500 SC)**

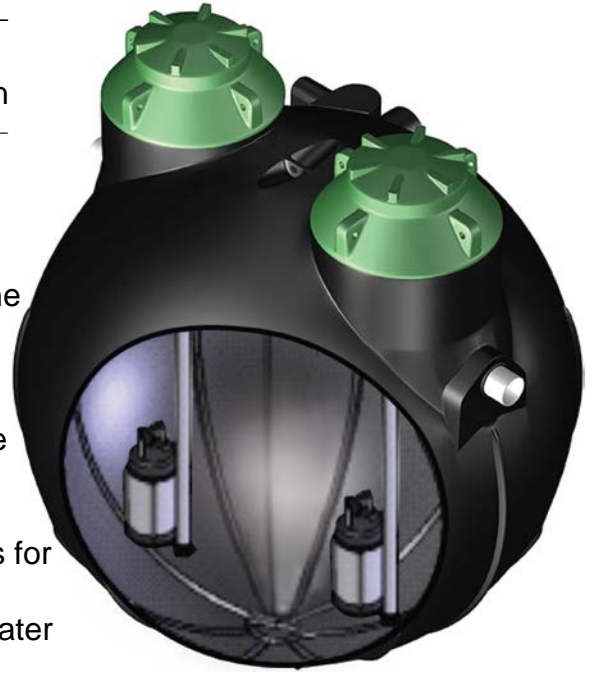

TECHNICAL DATA

Tank Volume (Litres)	3300	Weight (Pump)	37Kg x 2
Dimensions (mm)	2150 x 2000	Max Head (m)	18 Including Sump Depth
Inspect Hatch (mm)	290 Ø x 2	Alarm (Type)	Audio/Visual Float Activated
Total Weight (Kg)	274	Inlet	100mm PVC class D
Pump (Type)	W-1500SC x 2	Discharge	50mm PVC class D
Motor Rating	1.5kW, 230v, 13amps	Valves	50mm non return & isolating

Pump Performance

