WASHDOWN TRANSFER PUMPS

FEATURES

- Suitable for mains and low pressure systems
- · Single stage monobloc non self priming pump with axial suction and vertical discharge
- 2 year on-site parts and labour warranty
- · Built-in thermal overload unit
- · All stainless steel pump housing
- · Impeller mounted directly on the motor shaft extension making pump suitable for continuous duty

MS100/0.55 MS100/1.1

Domestic water supply, cooling water systems, sprinkler systems, agriculture, boosting and circulation systems and water treatment.

304 Stainless steel range: Clear non-aggressive liquids Stainless steel construction.




MS250/1.5 MS250/2.2 3PH MS330/2.2 3PH

Domestic water supply, cooling water systems, sprinkler systems, agriculture, boosting and circulation systems and water treatment.


304 Stainless steel range: Clear non-aggressive liquids Stainless steel construction.



PUMP PERFORMANCE: — MS100/1.1 — MS100/0.55

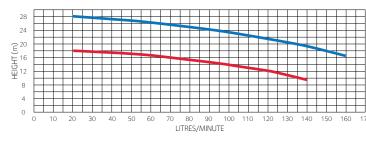



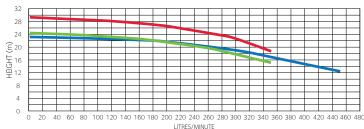

HYDROFLO TRANSFER PUMP

FEATURES

- · Fully automatic
- · In-built run dry protection
- Suitable for mains and low pressure systems
- 2 year on-site parts and labour warranty
- Suitable for use with header tanks
- Provides constant pressure at constant flow
- · Very low maintenance brass construction means it will not corrode and seize will idle

HF40

The Hydroflo 40 is a budget model, small but is a powerful brass peripheral turbine pump ideally suited for a header tank pump.

Brass impeller.



PUMP PERFORMANCE: -

